





Backlit Fabric Pop-Up Display

Assembly Instructions

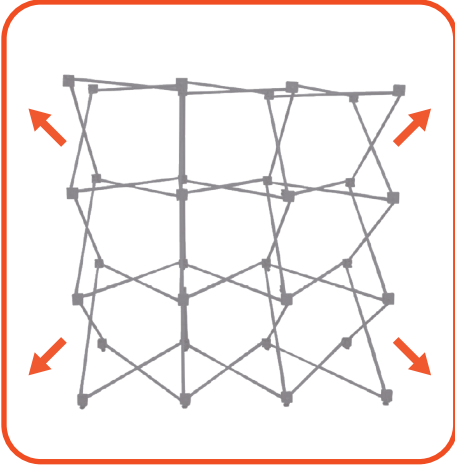


Step 1

Place frame with the adjustable feet facing down. Expand the frame.

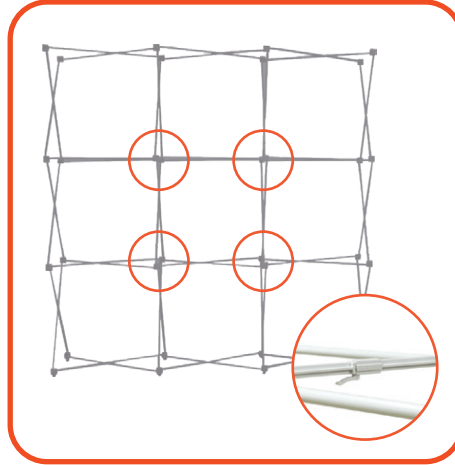


Step 2

Close frame by pushing the outside of the frame until male and female ends connect. Repeat for all connectors.

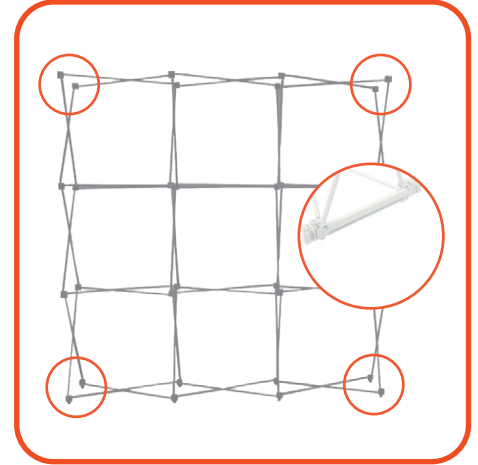


Step 3

Connect the top and bottom End Caps on each side of the frame.

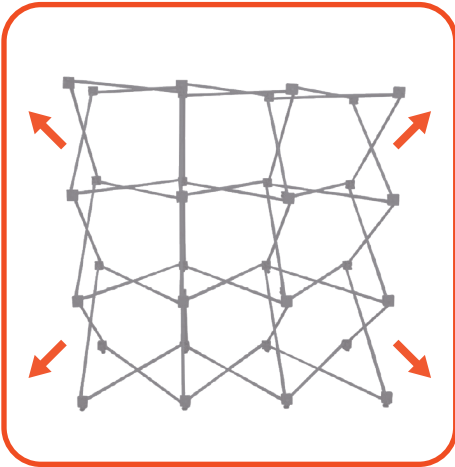


Step 4

Expand each Channel Bar. Follow bungee to connect.

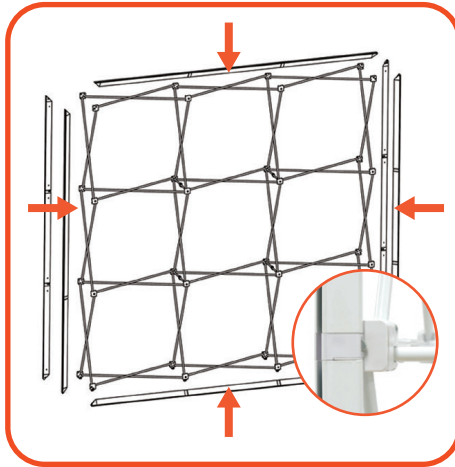

Step 5

Attach channel bars to frame. Slide channel bars onto frame from top to bottom, then secure onto metal peg.

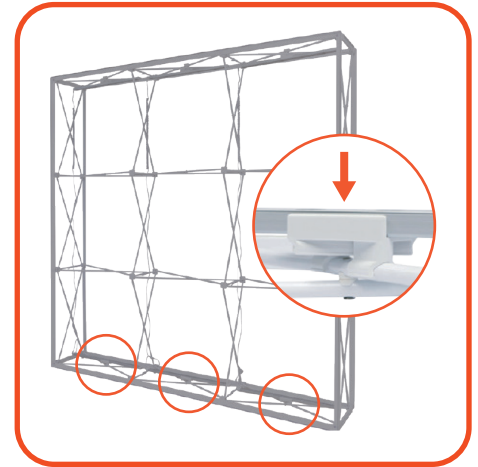


Step 6

Snap the Edge Lights on each bottom middle "x" bars.




Backlit Fabric Pop-Up Display *Assembly Instructions*

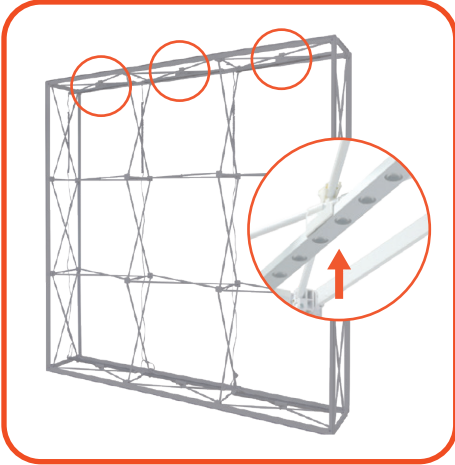

Step 7

Then snap the Edge Lights on each top middle "x" bars.

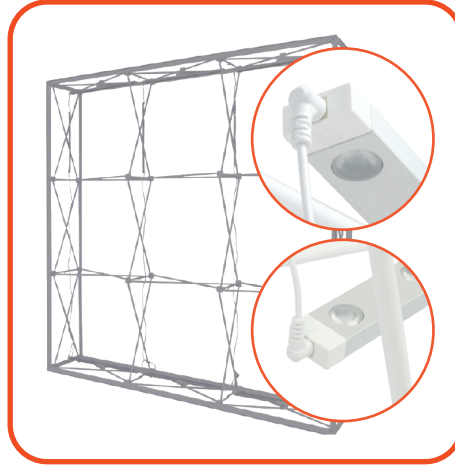

Step 8

Plus the Jumper Cords into the top and bottom Edge Lights together.



Step 9

Connect the Jumper Cord to the Transformer using the barrel connectors.



Step 10

Insert power cord to the Transformer. Plug other side into your main power outlet (once graphics are installed onto the frame).



Step 11

Install one piece graphic on the front side of the frame. Start on each corner of the end caps. Insert the silicone edge beading into the groove corners (top & bottom). Repeat graphic installation on other side of the end caps.



Step 12

Then insert the remainder of the beading of the one piece graphic. Repeat graphic installation on the back side of the frame.